


## Electric Drop Bolt

### MP-553

Electric drop bolt lock with ball bearing sensor  
帶磁珠電插鎖

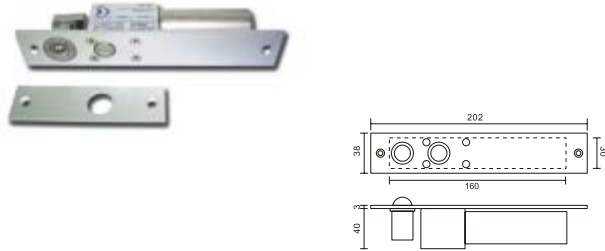

MP-553 had been thoroughly tested under the CE standard. Fail Safe function complies with the regulation of "SAFETY AND SECURITY"

MP-553斷電安全功能按CE歐標“安全與保安”嚴格檢測通過。

#### SPECIFICATIONS :


Face Plate	: 202L x 38W x 3Dmm
Body	: 160L x 30W x 40Dmm
Strike Plate	: 102L x 38W x 3Dmm
Voltage	: 12V / 24VDC
Current draw	: 0.9A/12VDC , 0.45A/ 24VDC
Holding Current	: 0.3A/12VDC , 0.15/24VDC
Material	: Face plate made of aluminum, Bolt made of stainless steel

#### 規格:

面板	: 202L x 38W x 3Dmm
鎖身	: 160L x 30W x 40Dmm
鎖口片	: 102L x 38W x 3Dmm
電壓	: 12V / 24VDC
作用電流	: 0.9A/12VDC , 0.45A/ 24VDC
止動電流	: 0.3A/12VDC , 0.15/24VDC
材料	: 鋁製面板, 不銹鋼鎖栓

### MP-553B

Economical Electric Drop Bolt lock  
with ball bearing sensor  
經濟型帶磁珠電插鎖

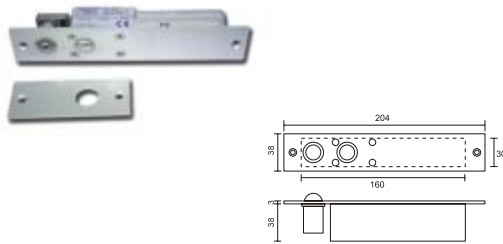

MP-553B had been thoroughly tested under the CE standard. Fail Safe function complies with the regulation of "FIRE ESCAPE REGULATION".

MP-553B斷電安全功能按CE歐標“火警逃生規例”嚴格檢測通過。

#### SPECIFICATIONS :

Face Plate	: 204L x 38W x 3Dmm
Body	: 160L x 30W x 38Dmm
Strike Plate	: 102L x 38W x 3Dmm
Voltage	: 12VDC
Current draw	: 0.8A/12VDC
Holding Current	: 0.28A/12VDC
Material	: Face plate made of aluminum, Bolt made of stainless steel

#### 規格尺寸:

面板	: 204L x 38W x 3Dmm
鎖身	: 160L x 30W x 38Dmm
鎖口片	: 102L x 38W x 3Dmm
電壓	: 12VDC
作用電流	: 0.8A/12VDC
止動電流	: 0.28A/12VDC
材料	: 鋁製面板, 不銹鋼鎖栓


"Marco Polo" Electric Drop bolt locks with ball bearing sensor can be used with any kind of Electronic Digital On/Off switches, Magnetic stripe Card Reader, Proximity Card Reader and Biological access control system.

帶磁珠電插鎖可與電子開關制、磁帶閱讀器、感應卡讀頭及生物辨識門禁系統配套。

## Electric Drop Bolt

### MP-554

Economical electric Drop Bolt lock with magnetic sensor  
帶磁感電插鎖

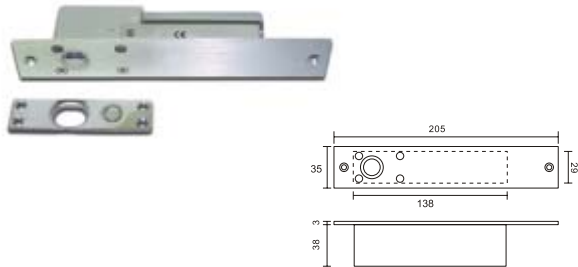

It has been thoroughly tested under the CE standard. Fail Safe function complies with the "FIRE ESCAPE REGULATION" Magnetic Type W/Signal (NC)

本型號斷電安全功能按CE歐標"火警逃生規例"嚴格檢測通過。

#### SPECIFICATIONS :


Face Plate : 205L x 35W x 3Dmm  
Body : 138L x 29W x 38Dmm  
Strike Plate : 90L x 25W x 2Dmm  
Voltage : 12VDC  
Current draw : 1A/12VDC  
Holding Current : 0.3A/12VDC  
Material : Face plate made of aluminum,  
Bolt made of stainless steel

#### 規格:

面板 : 205L x 35W x 3Dmm  
鎖身 : 138L x 29W x 38Dmm  
鎖口片 : 90L x 25W x 2Dmm  
電壓 : 12VDC  
作用電流 : 1A/12VDC  
止動電流 : 0.3A/12VDC  
材料 : 鋁製面板, 不銹鋼鎖栓

### MP-555-K

Electric Bolt with Euro-profile cylinder (Fail Secure)  
斷電保固電插連插芯鎖膽

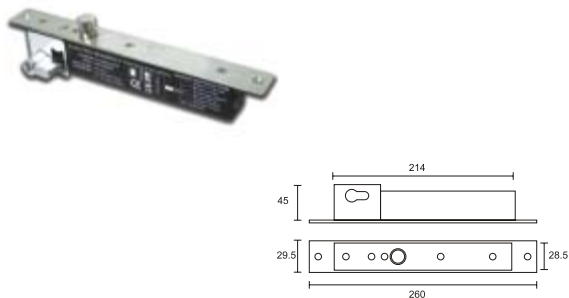

#### SPECIFICATIONS :



Face Plate : 260L x 29.5W x 3Dmm  
Body : 214L x 28.5W x 45Dmm  
Strike Plate : 99.5L x 25W x 2Dmm  
Voltage : 12VDC  
Current draw : 1A/12VDC  
Holding Current : 0.1A/12VDC  
Material : Face plate and bolt made of stainless steel

#### 規格:

面板 : 260L x 29.5W x 3Dmm  
鎖身 : 214L x 28.5W x 45Dmm  
鎖口片 : 99.5L x 25W x 2Dmm  
電壓 : 12VDC  
作用電流 : 1A/12VDC  
止動電流 : 0.1A/12VDC  
材料 : 不銹鋼製面板及鎖栓

### MP-571

Electric Cabinet Lock  
機櫃電鎖

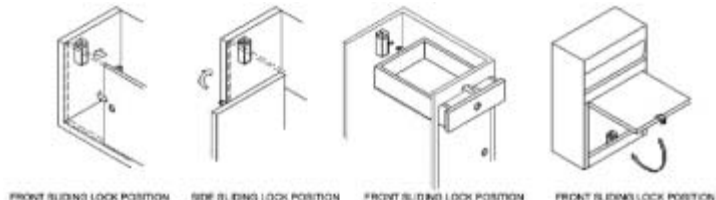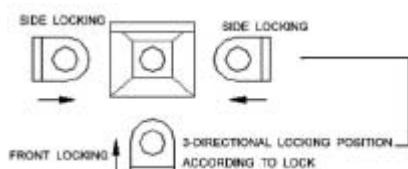

#### SPECIFICATIONS :

Dimension : 82L x 30W x 28Dmm  
Voltage : 12V / 24VDC  
Current : 300mA/12VDC, 150mA/24VDC

#### 規格:

外形尺寸 : 82L x 30W x 28Dmm  
輸入電壓 : 12V/ 24VDC  
電流 : 300mA/12VDC, 150mA/24VDC